


Standard Line

- Produce the most common types of pallets effortlessly
- Reduce your costs not only for energy with the patented electric nailing system
- Invest only in what you need
- We will adapt to the space
- Smartly save on production material in the form of loose nails



[WEB LINK](#)

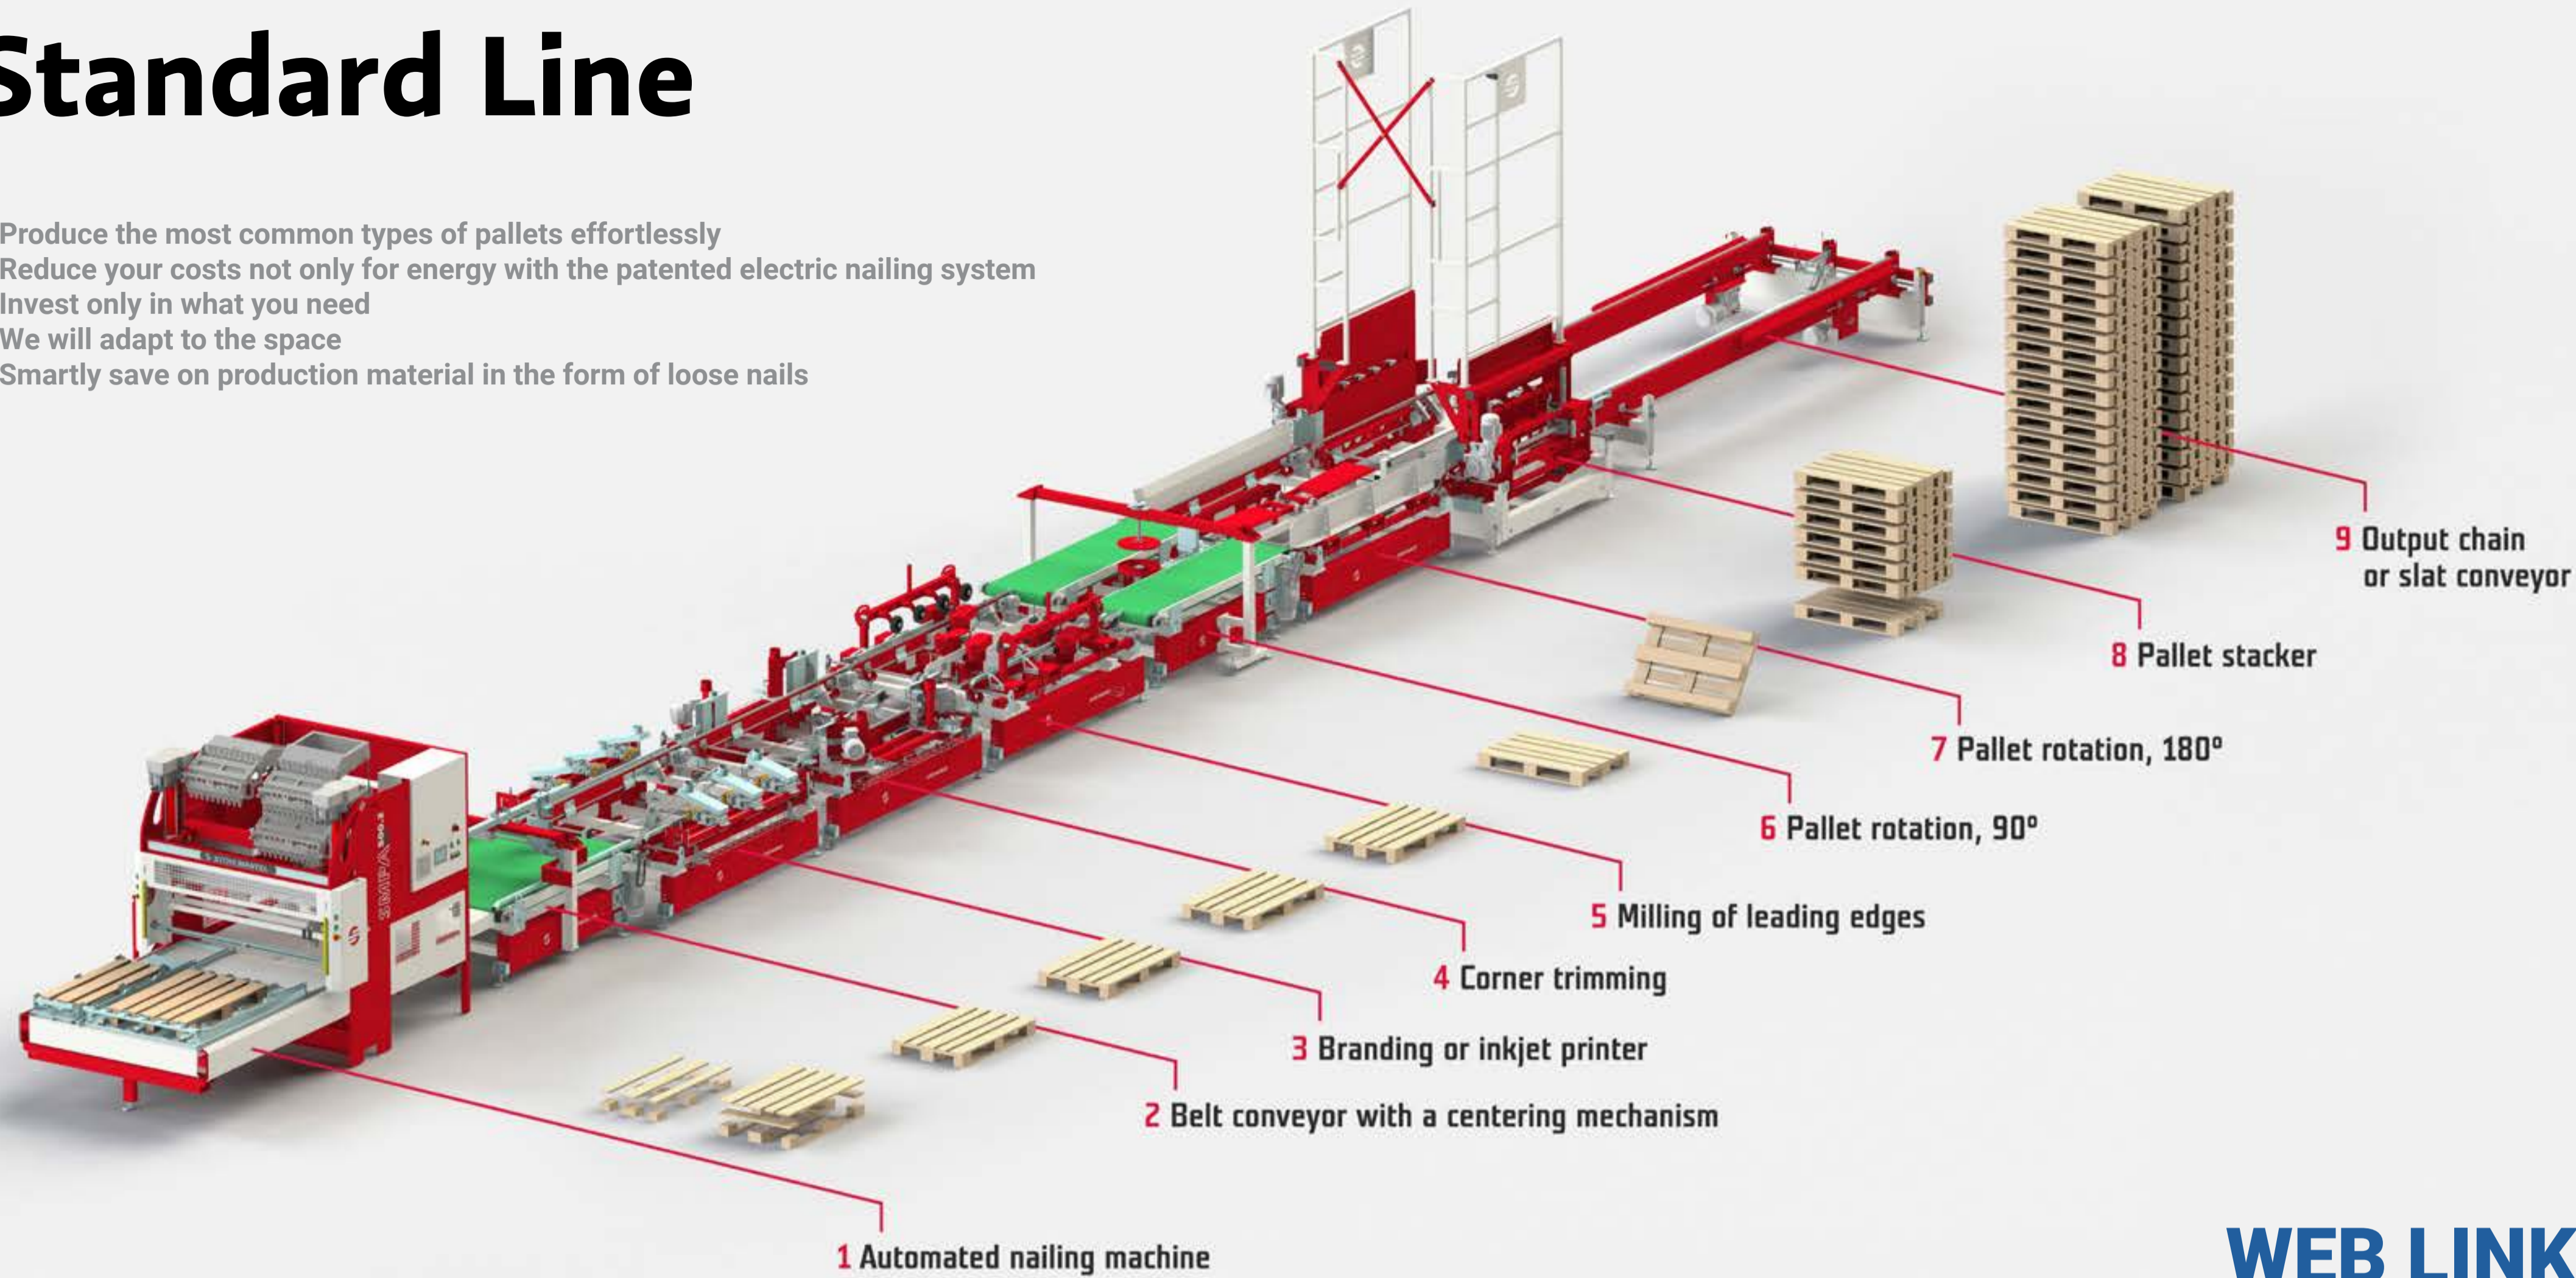


PARAMETER	VALUE
FEED MATERIAL	
Cube size (W x H x D)	min. 60 x 60 x 60 mm max. 145 x 100 x 145 mm
Transverse Stringer Plates (W x H x L)	min. 60 x 16 x 600 mm max. 150 x 25 x 1 200 mm
Longitudinal top plates (W x H x L)	min. 60 x 16 x 600 mm max. 150 x 25 x 1500 (2 000, 2 500, 3000) mm
Longitudinal bottom plates (W x H x L)	min. 60 x 16 x 600 mm max. 150 x 25 x 1 500 (2 000, 2 500, 3 000) mm
PALLET DIMENSIONS	
Two-way, four-way (W x H x L)	min. 600 x 100 x 600 mm max. 1200 x 160 x 1 500 (2 000, 2 500, 3 000) mm
PARAMETERS OF LOOSE NAILS	
Types of nails	Convex Screw Machine Smooth
Nail length min.-max.	27 - 90 mm
Shank diameter	2.5 - 4.2 mm
Head diameter	5.5 - 9 mm
Min. nail spacing	25 mm
OPERATION	
Number of employees	1 - 2
PRODUCTION CAPACITY	
Number of pallets per minute	1 - 2 pcs
CONNECTION	
Dust extraction (number of extraction points according to the composition of the line)	Ø 100 mm - 25-30 m/s
Compressed air	pressure min. 0,6 MPa - 1 MPa
Voltage	~ 3x400 V/50 Hz

Technical drawing

MINIMUM CEILING HEIGHT
ABOVE NAILING MACHINE
3 300 MM

MINIMUM CEILING HEIGHT
ABOVE STACKER 4 300 MM

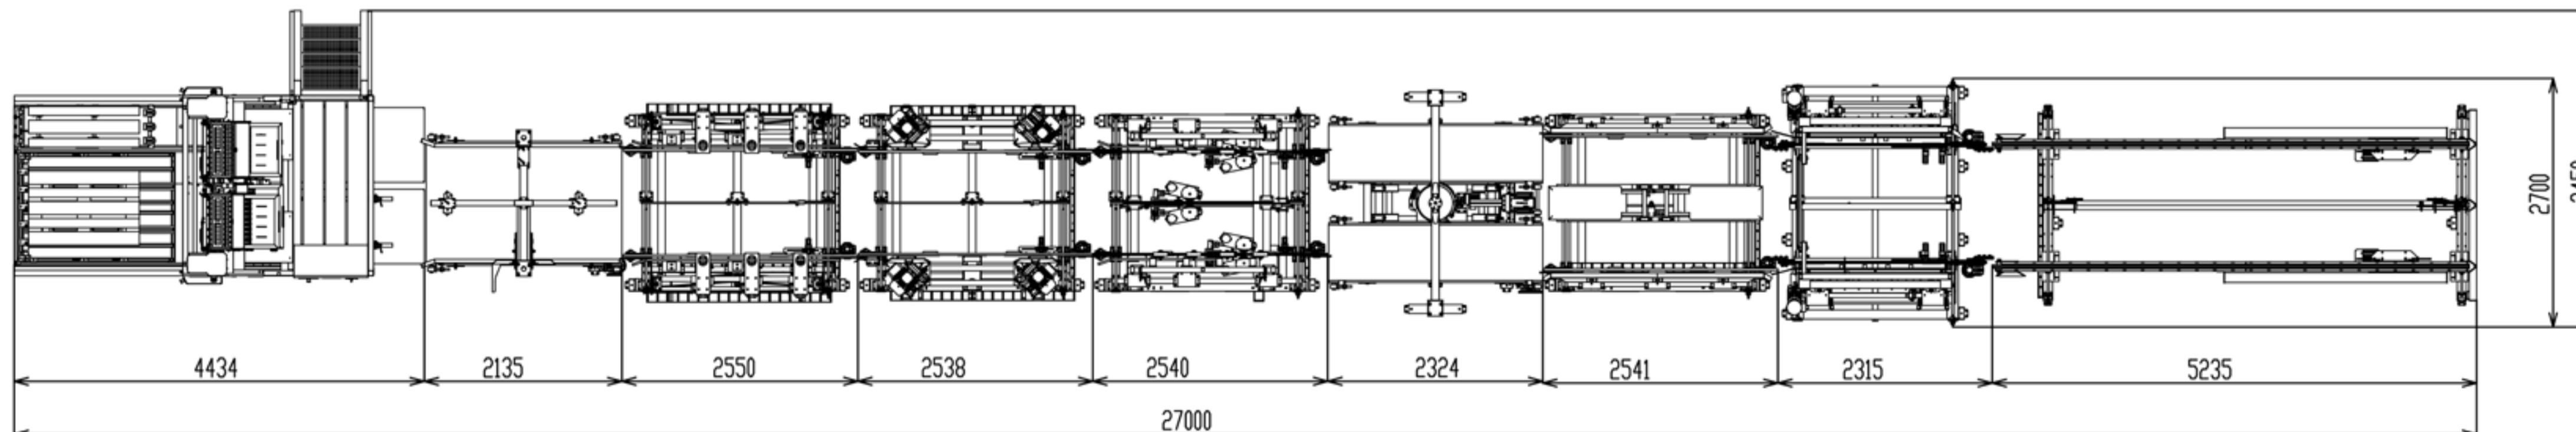

PALLET TYPES

4 WAY PALLETS

EURO (EPAL)	
CLASSIC	
EVEN TOP BOARDS	
FULLY DECK	
WINGED	
2 WAY PALLETS	
CLASSIC	
STRINGER	
COMPONENTS	
PALLET DECKS	